

# Fittings

## Metal Face Seal and Weld Fittings



### Fittings designed for ultra-high purity conditions for critical applications

These UHP fittings are designed for critical applications where ultra-high pure conditions are required.

The weld fittings provide compact designs for use with orbital weld equipment and the metal face seal fittings provide a high integrity metal-to-metal seal for reliable service from vacuum to positive pressure.



### Contact Information:

Parker Hannifin Corporation  
**Veriflo Division**  
250 Canal Blvd  
Richmond, California 94804

phone 510 235 9590  
fax 510 232 7396  
veriflo.sales@parker.com

www.parker.com/veriflo  
Mobile App: m.parker.com/veriflo






























### Product Features:

- Ultra-High Purity cleaning, assembly, and packaging in a Class 100 Clean Room environment for all wetted components.
- Material traceability to original mill certificate.
- Semi F20 compliant material for all face seal glands and weld fittings.
- Metal face seal fittings are rated to  $1 \times 10^{-9}$  scc/sec He inboard when installed
- Tube butt weld ends are square and sharp
- For use with orbital welding equipment.
- Highly controlled internal wetted surfaces.

**ENGINEERING YOUR SUCCESS.**






# Metal Face Seal and Weld Fittings

## Index

 <p>Metal Face Seal Fitting Female Gland</p> <p>5</p>	 <p>Metal Face Seal Fitting Male Nut</p> <p>6</p>	 <p>Gaskets Retained Flat Style</p> <p>9</p>
 <p>Metal Face Seal Fitting Male Gland</p> <p>5</p>	 <p>Metal Face Seal Fitting Short Male Nut</p> <p>7</p>	 <p>Gaskets Non-Retained Grooved Style</p> <p>9</p>
 <p>Metal Face Seal Fitting Short Socket Weld</p> <p>5</p>	 <p>Metal Face Seal Fitting Female Cap</p> <p>7</p>	 <p>Gaskets Retained Grooved Style</p> <p>9</p>
 <p>Metal Face Seal Fitting Socket Gland</p> <p>5</p>	 <p>Metal Face Seal Fitting Female Cap (Lanyard)</p> <p>7</p>	 <p>Weld Fitting Reducing Union</p> <p>12</p>
 <p>Metal Face Seal Fitting Reducing Socket Weld</p> <p>5</p>	 <p>Metal Face Seal Fitting Male Plug</p> <p>7</p>	 <p>Weld Fitting Union Elbow</p> <p>12</p>
 <p>Metal Face Seal Fitting Male Weld</p> <p>6</p>	 <p>Metal Face Seal Fitting Male Plug (Lanyard)</p> <p>7</p>	 <p>Weld Fitting Extended Union Elbow</p> <p>12</p>
 <p>Metal Face Seal Fitting Tube Adapter Gland (A-LOK™)</p> <p>6</p>	 <p>Metal Face Seal Fitting Female Nut, Hi-Flo</p> <p>8</p>	 <p>Weld Fitting Reducing Elbow</p> <p>13</p>
 <p>Metal Face Seal Fitting Female Gland, Hi-Flo</p> <p>6</p>	 <p>Metal Face Seal Fitting Male Nut, Hi-Flo</p> <p>8</p>	 <p>Weld Fitting Tribow</p> <p>13</p>
 <p>Metal Face Seal Fitting Female Nut</p> <p>6</p>	 <p>Gaskets Non-Retained Flat Style</p> <p>9</p>	 <p>Weld Fitting Union Elbow, 45°</p> <p>13</p>

# Metal Face Seal and Weld Fittings

## Index

	Weld Fitting Union Tee	14
	Weld Fitting Reducing Tee	14
	Weld Fitting Extended Branch	14
	Weld Fitting Run Tree	15
	Weld Fitting Union Cross	15

# Metal Face Seal Fittings

## Introduction

Parker metal face seal fittings are designed for critical applications where ultra-high pure conditions are required. The mating gasket and toroid design provide a high integrity metal-to-metal seal for reliable service from vacuum to positive pressure.

## Specifications

- Pressure ratings comply with calculations per ANSI Code for Pressure Piping B31.3 using 20 ksi allowable stress factor for 316 at ambient temperature (72°F)
- Dimensions are for reference only and are subject to change.
- Female Nut load bearing surfaces are Silver plated with a protective coating. Avoid aggressive chemical processes used for cleaning, electropolishing and passivation that will remove plating. Removal or damage to plating will cause threads to gall, damaging fitting components and preventing a proper seal.
- Leakage: Metal face seal products are rated to a Helium inboard leak rate of  $1 \times 10^{-9}$  STD cc/sec.
- Standard finish metal face seal fittings have an internal surface roughness average of 10  $\mu\text{in.}$  (0.25 $\mu\text{m}$ ) Ra. PE finished fittings have an internal surface roughness average of 5  $\mu\text{in.}$  (0.13 $\mu\text{m}$ ) Ra.
- Ultra high purity cleaning, assembly, and packaging in a Class 100 clean room environment is standard for all wetted components.

## Features

- **Compact Design** allows for system miniaturization and close coupled spacing.
- **Material traceability** via permanently marked heat codes on each wetted component.
- **Permanent product designation** identifies manufacturer, material and internal finish when applicable.
- **Enhanced female nut silver plating** promotes consistent easy assembly.
- **Controlled wetted surfaces** meet stringent ultra high purity system requirements by preventing outgassing and inhibiting corrosion.
- **Patented Torqtite™ gasket** promotes sealing of damaged toroids and virtually eliminates assembly loosening due to vibration or thermo-cycling.

## Materials


### Typical Raw Material Specifications

Fitting Material	Designator	Bar Stock	Recommended Tubing Specifications
Stainless Steel 316	SS	ASTM A276, ASME SA479	ASME SA213, ASTM A213, ASTM A249
Stainless Steel 316L	SSS	Semi F20-0706 ASTM A276, ASME SA479	ASME SA213, ASTM A213, ASTM A249
Stainless Steel 316L, double melt	SSD	Semi F20-0706 ASTM A276, ASME SA479	ASTM A269, MIL T8504, MIL T8506

### Gaskets Typical Raw Material Specifications

MATERIAL SPECIFICATIONS	
Nickel	ASTM B162 (unplated)
Stainless Steel	ASTM A167 (Silver plated)

\*Material is marked with heat code to ensure raw material traceability.

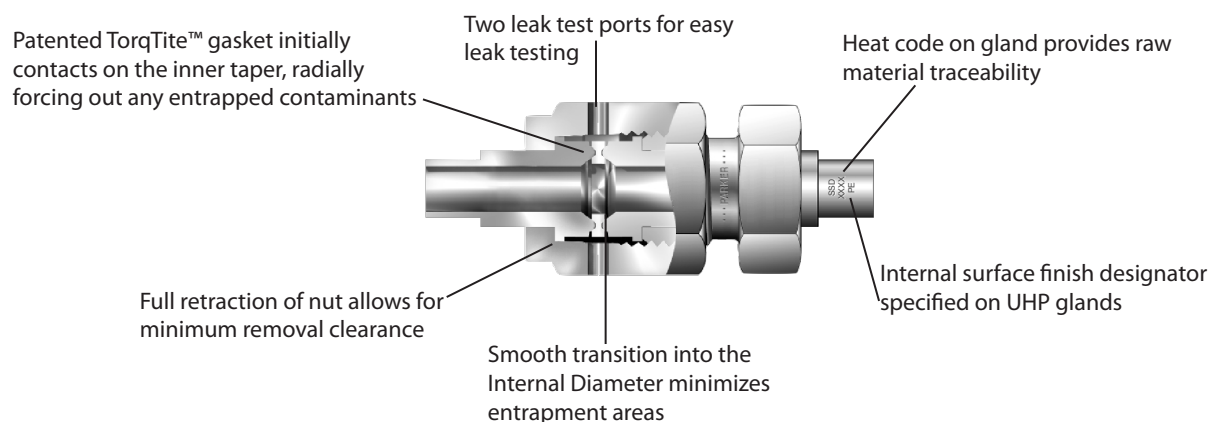


# Metal Face Seal Fittings

## Glands


### Female Gland

Face Seal Size	T Tube O.D.	Ordering Number	C		E		H		Normal Wall Thickness	Working Pressure	
			in.	mm	in.	mm	in.	mm		psi	bar
1/4	1/4	□ - 4FG-25	0.25	6.3	0.18	4.6	0.60	15.2	0.035	5100	350
1/4	1/4	□ - 4FG-38	0.38	9.7	0.18	4.6	0.72	18.3	0.035	5100	350
1/4	1/4	□ - 4FG-75	0.75	19.0	0.18	4.6	1.10	27.9	0.035	5100	350
1/2	1/4	□ - 84FG-75	0.75	19.0	0.18	4.6	1.12	28.4	0.035	3500	240
1/2	3/8	□ - 86FG-25	0.25	6.3	0.30	7.9	0.63	15.7	0.035	3300	220
1/2	3/8	□ - 86FG-75	0.75	19.0	0.30	7.9	1.12	28.4	0.035	3300	220
1/2	1/2	□ - 8FG-25	0.25	6.3	0.40	10.2	0.63	15.7	0.049	3500	240
1/2	1/2	□ - 8FG-38	0.38	9.7	0.40	10.2	0.74	18.8	0.049	3500	240
1/2	1/2	□ - 8FG-75	0.75	19.0	0.40	10.2	1.12	28.4	0.049	3500	240




### Male Gland

Face Seal Size	T Tube O.D.	Ordering Number	C		E		H		Normal Wall Thickness	Working Pressure	
			in.	mm	in.	mm	in.	mm		psi	bar
1/4	1/4	□ - 4MG-25	0.25	6.3	0.18	4.6	1.20	30.5	0.035	5100	350
1/4	1/4	□ - 4MG-38	0.38	9.7	0.18	4.6	1.32	33.5	0.035	5100	350
1/4	1/4	□ - 4MG-75	0.75	19.0	0.18	4.6	1.70	43.2	0.035	5100	350
1/2	1/4	□ - 84MG-75	0.75	19.0	0.18	4.6	1.79	45.7	0.035	3500	240
1/2	3/8	□ - 86MG-25	0.25	6.3	0.30	7.9	1.29	32.8	0.035	3300	220
1/2	3/8	□ - 86MG-75	0.75	19.0	0.30	7.9	1.79	45.5	0.035	3300	220
1/2	1/2	□ - 8MG-25	0.25	6.3	0.40	10.2	1.29	32.8	0.049	3500	240
1/2	1/2	□ - 8MG-38	0.38	9.7	0.40	10.2	1.41	35.8	0.049	3500	240
1/2	1/2	□ - 8MG-75	0.75	19.0	0.40	10.2	1.79	45.5	0.049	3500	240
3/4	3/4	□ - 12MG-75	0.75	19.0	0.65	16.5	2.03	51.6	0.049	2400	160
1	1	□ - 16MG-75	0.75	19.0	0.87	22.1	2.32	58.9	0.065	2400	160




### Short Socket Weld

Face Seal Size	T Tube Socket	Ordering Number	D		E		H		Tx		Working Pressure	
			in.	mm	in.	mm	in.	mm	in.	mm	psig	bar
1/4	1/4	SSS - 4SSW-.50	0.28	7.1	0.19	4.8	0.50	12.7	0.35	8.9	5500	370
1/4	1/4	SSS - 4SSW-.75	0.28	7.1	0.19	4.8	0.75	19.0	0.35	8.9	5500	370




### Reducing Socket Weld

Face Seal Size	T Tube Socket	Ordering Number	D		E		H		Tx		Working Pressure	
			in.	mm	in.	mm	in.	mm	in.	mm	psig	bar
1/4	1/8	SSS - 42RSW	0.16	4.1	0.09	2.3	1.31	33.3	0.35	8.9	8000	550
1/2	1/4	SSS - 84RSW	0.25	6.3	0.19	4.8	1.50	38.1	0.60	15.2	3500	240



### Socket Weld

Face Seal Size	T Tube Socket	Ordering Number	D		E		H		Tx		Working Pressure	
			in.	mm	in.	mm	in.	mm	in.	mm	psig	bar
1/4	1/4	SSS - 4SW	0.28	7.1	0.19	4.6	1.31	33.3	0.35	8.9	5500	370
1/2	3/8	SSS - 86SW	0.31	7.9	0.28	7.1	1.50	38.1	0.60	15.2	3500	240
1/2	1/2	SSS - 8SW	0.38	9.7	0.41	10.2	1.50	38.1	0.60	15.2	3000	200
3/4	3/4	SSS - 12SW	0.44	11.2	0.62	15.7	2.00	50.8	0.88	22.4	2800	190
1	1	SSS - 16SW	0.62	15.7	0.87	22.1	2.22	56.4	1.19	30.2	2400	160




# Metal Face Seal Fittings

## Glands


### Male Weld

Face Seal Size	T Tube O.D.	Ordering Number	C		E		H		Working Pressure	
			in.	mm	in.	mm	in.	mm	psig	bar
1/4	1/4	SSS - 4MW	0.41	10.4	0.12	3.0	1.31	33.3	8000	550
1/2	1/4	SSS - 84MW	0.41	10.4	0.12	3.0	1.50	38.1	3500	240
1/2	3/8	SSS - 86MW	0.41	10.4	0.28	7.1	1.50	38.1	3500	240
1/2	1/2	SSS - 8MW	0.50	12.7	0.40	10.2	1.50	38.1	3500	240
3/4	3/4	SSS - 12MW	0.62	15.7	0.53	13.5	2.00	50.8	3000	200
1	1	SSS - 16MW	0.81	20.6	0.75	19.0	2.22	56.4	2400	160




### Tube Adapter Gland (A-LOK®)

Face Seal Size	T Tube O.D.	Ordering Number	C		E		H		Working Pressure	
			in.	mm	in.	mm	in.	mm	psig	bar
1/4	1/4	SSS - 4TAG	0.63	15.7	0.19	4.1	1.63	41.1	8000	550
1/2	3/8	SSS - 86TAG	0.70	17.5	0.28	7.1	1.81	46.0	3500	240
1/2	1/2	SSS - 8TAG	0.93	23.1	0.39	9.9	1.78	45.2	3500	240



### Female Gland, Hi-Flo


Face Seal Size	T Tube O.D.	Ordering Number	B		E		E1		H		Working Pressure	
			in.	mm	in.	mm	in.	mm	in.	mm	psig	bar
1/4	3/8	□ - 46HFG-60	0.41	10.4	0.25	6.4	0.30	7.6	0.60	15.2	3300	220
1/4	3/8	□ - 46HFG-1.19	1.00	25.4	0.25	6.4	0.30	7.6	1.19	30.2	3300	220
1/4	3/8	□ - 46HFG-1.31	1.12	28.4	0.25	6.4	0.30	7.6	1.31	33.3	3300	220



## Nuts, Caps, and Plugs


### Female Nut

Ordering Number	Size	F Hex Flat	H		Tx	
			in.	mm	in.	mm
SS - 4FN	1/4	3/4	0.82	20.8	0.36	9.1
SS - 8FN	1/2	1 1/16	0.88	22.4	0.61	15.5
SS - 12FN	3/4	1 1/2	1.12	28.4	0.89	22.6
SS - 16FN	1	1 3/4	1.34	34.0	1.20	30.5



### Male Nut

Ordering Number	Size	F Hex Flat	H		Tx	
			in.	mm	in.	mm
SS - 4MN	1/4	5/8	0.72	18.3	0.36	9.1
SS - 8MN	1/2	15/16	0.81	20.6	0.61	15.5
SS - 12MN	3/4	1 5/16	1.00	25.4	0.89	22.6
SS - 16MN	1	1 5/8	1.19	30.2	1.20	30.5




# Metal Face Seal Fittings

## Nuts, Caps, and Plugs


### Short Male Nut

Ordering Number	Size	F Hex Flat	H		Tx	
			in.	mm	in.	mm
SS - 4SMN-.54	1/4	5/8	0.54	13.7	0.36	9.1




### Female Cap

Ordering Number	Size	C		F Hex Flat	H	
		in.	mm		in.	mm
SS - 4FCP	1/4	0.59	15.0	3/4	1.09	27.7
SS - 8FCP	1/2	0.59	15.0	1 1/16	1.16	29.5
SS - 12FCP	3/4	0.68	16.8	1 1/2	1.41	35.8
SS - 16FCP	1	0.66	16.0	1 3/4	1.55	39.4




### Female Cap (Lanyard)

Ordering Number	Size	C		F Hex Flat	H		Lanyard Length	
		in.	mm		in.	mm	in.	mm
SS - 4FCPL	1/4	0.59	15.0	3/4	1.09	27.7	6	152.4
SS - 8FCPL	1/2	0.59	15.0	1 1/16	1.16	29.5	6	152.4




### Male Plug

Ordering Number	Size	F Hex Flat	H	
			in.	mm
SS - 4MPG	1/4	5/8	0.91	23.1
SS - 8MPG	1/2	15/16	1.08	27.4
SS - 12MPG	3/4	1 5/16	1.43	36.3
SS - 16MPG	1	1 5/8	1.52	38.6



### Male Plug (Lanyard)

Ordering Number	Size	F Hex Flat	H		Lanyard Length	
			in.	mm	in.	mm
SS - 4MPGL	1/4	5/8	0.91	23.1	6	152.4
SS - 4MPGL	1/2	15/16	1.08	27.4	6	152.4




# Metal Face Seal Fittings

## Nuts, Caps, and Plugs



### Female Nut, Hi-Flo

Size	Ordering Number	F Hex Flat	H		Tx	
			in.	mm	in.	mm
3/8	SS - 4HFN	3/4	0.82	20.8	0.39	9.9



### Male Nut, Hi-Flo


Size	Ordering Number	F Hex Flat	H		Tx	
			in.	mm	in.	mm
3/8	SS - 4HMN	5/8	0.72	18.3	0.39	9.9



# Gaskets

## Non-Retained Flat Style

Size	Ordering Number	E		H		Tx	
		in.	mm	in.	mm	in.	mm
1/4	4 VG-*	0.22	5.5	0.03	0.8	0.47	11.9
1/2	8 VG-*	0.44	11.1	0.03	0.8	0.78	19.9
3/4	12 VG-*	0.66	16.8	0.03	0.8	1.14	28.9
1	16 VG-*	0.89	22.7	0.03	0.8	1.41	35.7




## Retained Flat Style

Retainer and gasket must be used as an assembly.


Note: Nickel Retained Flat Style Gaskets utilize a Stainless Steel Retainer

Size	Ordering Number	E		H		Tx	
		in.	mm	in.	mm	in.	mm
1/4	4 VGR-*	0.23	5.8	0.03	0.8	0.50	12.7
1/2	8 VGR-*	0.44	11.2	0.03	0.8	0.79	20.1




## Non-Retained Grooved Style (TorqTite™ Gasket)

Size	Ordering Number	E		H		Tx		T	
		in.	mm	in.	mm	in.	mm	in.	mm
1/4	4 GVG-*	0.21	5.3	0.06	1.6	0.50	12.6	0.03	0.8
1/2	8 GVG-*	0.43	10.9	0.06	1.6	0.78	19.8	0.03	0.8




## Retained Grooved Style (Retained TorqTite™ Gasket)

Size	Ordering Number	E		H		Tx		T	
		in.	mm	in.	mm	in.	mm	in.	mm
1/4	4 GVGR-*	0.21	1.3	0.06	1.6	0.49	12.4	0.03	0.8
1/2	8 GVGR-*	0.43	2.7	0.06	1.6	0.79	20.1	0.03	0.8



The retainer of Parker's patented Retained Flat Gasket helps to both locate the gasket over the toroid of the gland and hold the gasket in place during assembly, therefore minimizing radial damage to the toroids of the connection.

The unique design of the retainer minimizes potential scratches or nicks to the critical toroid surfaces during placement onto the gland.

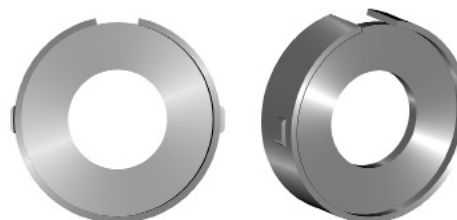

## Ordering Information

Specify gasket material by replacing asterisk with appropriate Ordering Number Designator.

Material	Ordering Number Designator	Example
High-Purity Nickel (electropolished)	N	4 VGR-N
Stainless Steel <sup>3</sup>	SS	4 VGR-SS
Teflon <sup>*12</sup>	T	4 VG-T

Blind (undrilled) gaskets are available by adding a -BL suffix at the end of the part number.  
Example: 4 VG-N-BL

- 1 Parker uses Teflon® or equal PTFE Polymer
- 2 Teflon® is only available for Non-Retained Flat Style gaskets
- 3 Stainless Steel gaskets are Silver plated

Note: All gaskets must be ordered in increments of 10  
Teflon® is a registered trademark of Dupont Company


# Metal Face Seal Fittings

## Makeup Information

### Flat and Grooved Gasket Assembly


#### Step 1

Remove gasket from packaging.

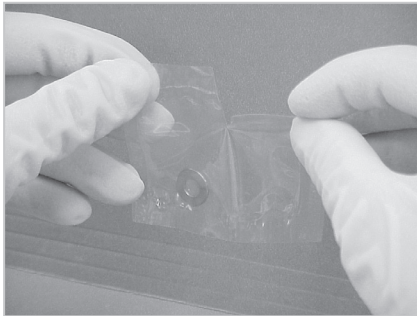


#### Step 2

Place gasket into female nut.

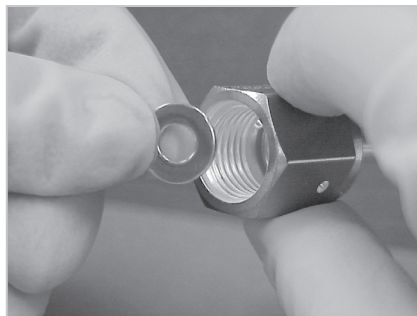


#### Step 3

Assemble components and snug to fingertight.

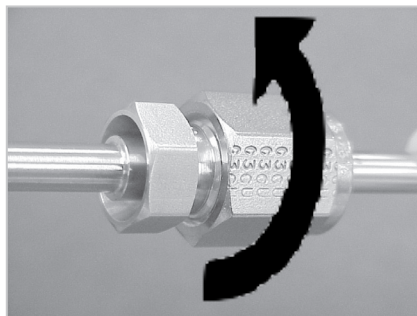

#### Step 4


Scribe the hex flat of both the male and female nuts.

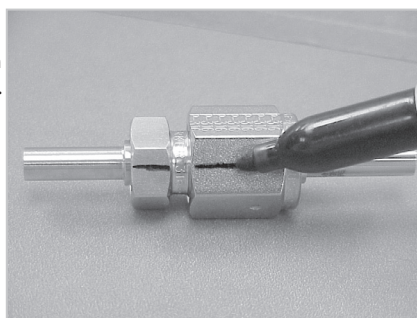

#### Step 5



Holding the backup wrench stationary, tighten the female nut 1/8 turn past fingertight.

Warning: Extreme over tightening will damage toroid surface and cause potential leakage.

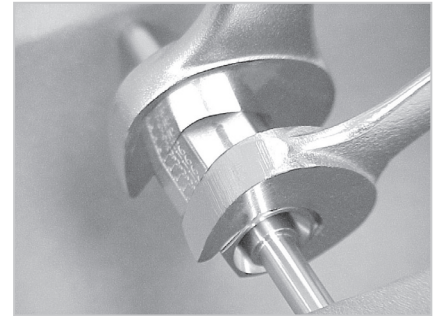

### Flat Gasket Remake

Upon remake of flat metal face seal gasket, a new gasket must be installed for each remake, follow procedures for initial make-up.



### Retained Gaskets Assembly

Guide retained gaskets over gland face, then continue step 3 of Flat and Grooved Gasket Assembly for completion of make-up.

# Weld Fittings

## Introduction

Parker weld fittings are designed where ultra-high pure applications are required. Optimized for orbital welding equipment, the compact sizes provides service and flow performance equal to larger weld fittings.



## Specifications

- Pressure Ratings will be governed by the tubing selected for a particular application. Working pressures are calculated below for tubing using 20 ksi allowable stress factor for 316 in accordance with ASME/ANSI B31.3 at ambient temperature (72°F).

Tube O.D.	Pressure Rating		Normal Wall Thickness
	psig	bar	
1/8 in.	8500	580	.028 in.
1/4 in.	5100	350	.035 in.
3/8 in.	3300	220	.035 in.
1/2 in.	3500	240	.049 in.
3/4 in.	2400	160	.049 in.


- Dimensions are for reference only and are subject to change.
- Standard finish weld fittings have an internal surface roughness average of 10  $\mu\text{in.}$  (0.25 $\mu\text{m}$ ) Ra. PE finished fittings have an internal surface roughness average of 5  $\mu\text{in.}$  (0.13 $\mu\text{m}$ ) Ra.
- Ultra high purity cleaning and packaging in a Class 100 clean room environment is standard for all wetted components.

## Materials

Material	Designator	Applicable Specifications
Stainless Steel 316L	SSS	Semi F20-0706 ASME SA479, ASTM A276
Stainless Steel 316L, double melt	SSD	Semi F20-0706 ASME SA479, ASTM A276

## Features


- Compact Design** allows for system miniaturization and close coupled spacing.
- Material traceability** via permanently marked heat codes on each wetted component.
- Permanent product designation** identifies manufacturer, material and internal finish when applicable.
- Sharp and square tube ends** improves alignment and weld repeatability.
- Smooth, radiused junctions** promote better flow transition, reduces turbulent flow, and reduces possible entrapment sites.
- Controlled wetted surfaces** meet stringent ultra high purity system requirements by preventing outgassing and inhibiting corrosion.

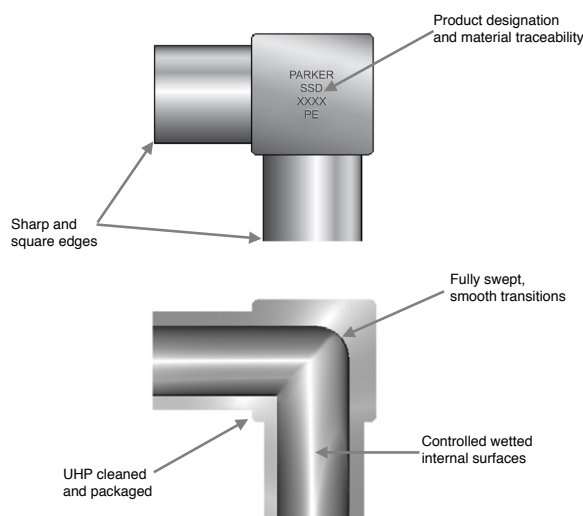

# Weld Fittings


## Reducing Union

T Tube O.D.	T <sub>1</sub> Tube O.D.	Part Number	A		B		B <sub>1</sub>		E		E <sub>1</sub>	
			in.	mm	in.	mm	in.	mm	in.	mm.	in.	mm.
1/4	1/8	□ - 42RU	0.75	19.1	0.50	12.7	0.25	6.4	0.18	4.6	0.07	1.8
3/8	1/4	□ - 64RU	0.75	19.1	0.50	12.7	0.25	6.4	0.30	7.7	0.18	4.6
1/2	1/4	□ - 84RU	0.75	19.1	0.50	12.7	0.25	6.4	0.40	10.2	0.18	4.6
1/2	3/8	□ - 86RU	0.75	19.1	0.50	12.7	0.25	6.4	0.40	10.2	0.30	7.7
3/4	1/4	□ - 124RU	0.75	19.1	0.50	12.7	0.25	6.4	0.65	16.6	0.18	4.6
3/4	3/8	□ - 126RU	0.75	19.1	0.50	12.7	0.25	6.4	0.65	16.6	0.30	7.7
3/4	1/2	□ - 128RU	0.75	19.1	0.50	12.7	0.25	6.4	0.65	16.6	0.40	10.2

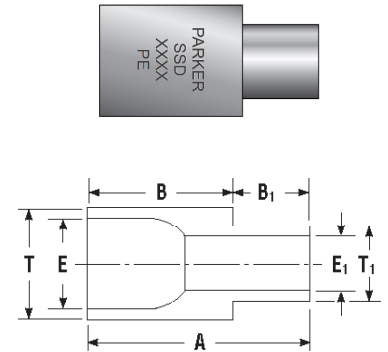


## Union Elbow

T Tube O.D.	Part Number	A		B		E		F Body Cube	L	
		in.	mm	in.	mm	in.	mm.		in.	mm.
1/4	□ - 4UE	0.56	14.2	0.25	6.4	0.18	4.6	5/16	0.41	10.4
3/8	□ - 6UE	0.69	17.5	0.25	6.4	0.30	7.7	7/16	0.47	11.9
1/2	□ - 8UE	0.81	20.6	0.25	6.4	0.40	10.2	9/16	0.53	13.5
3/4	□ - 12UE	1.06	27.0	0.25	6.4	0.65	16.6	13/16	0.66	16.7

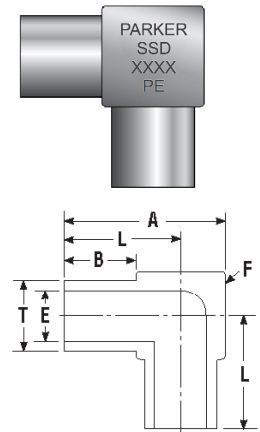

## Extended Union Elbow


T Tube O.D.	Part Number	A		A <sub>1</sub>		B		B <sub>1</sub>		E		F Body Cube	L		L <sub>1</sub>	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm.		in.	mm	in.	mm.
1/4	□ - 4EUE-4161	0.56	14.2	0.76	19.3	0.25	6.4	.45	0.5	0.18	4.6	5/16	0.41	10.41	0.61	15.5

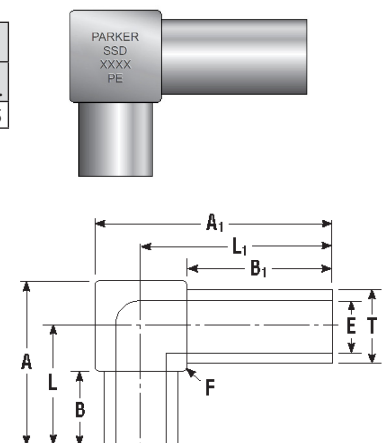

# Weld Fittings



## Reducing Elbow

T Tube O.D.	T <sub>1</sub> Tube O.D.	Part Number	A		A <sub>1</sub>		B		B <sub>1</sub>		E		E <sub>1</sub>		F Body Cube	L		L <sub>1</sub>	
			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		in.	mm.	in.	mm.
3/8	1/4	□ - 64RE	0.69	17.5	0.69	17.5	0.25	6.4	0.25	6.4	0.30	7.7	0.18	4.6	7/16	0.47	11.9	0.47	11.9
1/2	1/4	□ - 84RE	0.81	20.6	0.81	20.6	0.25	6.4	0.25	6.4	0.40	10.2	0.18	4.6	9/16	0.53	13.5	0.53	13.5
1/2	3/8	□ - 86RE	0.81	20.6	0.81	20.6	0.25	6.4	0.25	6.4	0.40	10.2	0.30	7.7	9/16	0.53	13.5	0.53	13.5
3/4	1/4	□ - 124RE	1.06	27.0	1.06	27.0	0.25	6.4	0.25	6.4	0.65	16.6	0.18	4.6	13/16	0.66	16.7	0.66	16.7
3/4	3/8	□ - 126RE	1.06	27.0	1.06	27.0	0.25	6.4	0.25	6.4	0.65	16.6	0.30	7.7	13/16	0.66	16.7	0.66	16.7
3/4	1/2	□ - 128RE	1.06	27.0	1.06	27.0	0.25	6.4	0.25	6.4	0.65	16.6	0.40	10.2	13/16	0.66	16.7	0.66	16.7





## Tribow

T Tube O.D.	Part Number	A		B		E		F Body Cube	L	
		in.	mm.	in.	mm.	in.	mm.		in.	mm.
1/4	□ - 4TB	0.56	14.2	0.25	6.4	0.18	4.6	5/16	0.41	10.4
3/8	□ - 6TB	0.69	17.5	0.25	6.4	0.30	7.7	7/16	0.47	11.9
1/2	□ - 8TB	0.81	20.6	0.25	6.4	0.40	10.2	9/16	0.53	13.5
3/4	□ - 12TB	1.06	27.0	0.25	6.4	0.65	16.6	13/16	0.66	16.7



## Union Elbow, 45°


T Tube O.D.	Part Number	A		B		E		F Body Cube	L	
		in.	mm.	in.	mm.	in.	mm.		in.	mm.
1/4	□ - 4UE45	0.47	11.9	0.25	6.4	0.18	4.6	5/16	0.41	10.4
3/8	□ - 6UE45	0.56	14.2	0.25	6.4	0.30	7.7	7/16	0.47	11.9
1/2	□ - 8UE45	0.64	16.3	0.25	6.4	0.40	10.2	9/16	0.53	13.5
3/4	□ - 12UE45	0.83	21.0	0.25	6.4	0.65	16.6	13/16	0.66	16.7



# Weld Fittings


## Union Tee

T Tube O.D.	Part Number	A		B		E		F Body Cube	L	
		in.	mm	in.	mm	in.	mm.		in.	mm.
1/4	□ - 4UT	0.82	20.8	0.25	6.4	0.18	4.6	5/16	0.41	10.4
3/8	□ - 6UT	0.94	23.9	0.25	6.4	0.30	7.7	7/16	0.47	11.9
1/2	□ - 8UT	1.06	26.9	0.25	6.4	0.40	10.2	9/16	0.53	13.5
3/4	□ - 12UT	1.31	33.4	0.25	6.4	0.65	16.6	13/16	0.66	16.7

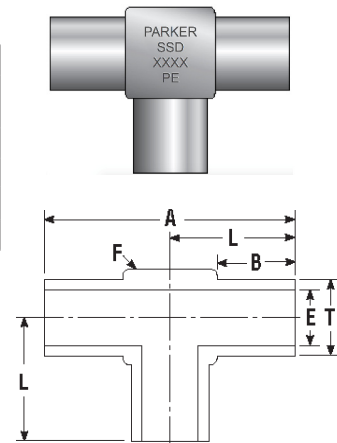


## Reducing Tee

T Tube O.D.	T <sub>1</sub> Tube O.D.	Part Number	A		B		B <sub>1</sub>		E		E <sub>1</sub>		F Body Cube	L		L <sub>1</sub>	
			in.	mm	in.	mm	in.	mm	in.	mm.	in.	mm.		in.	mm	in.	mm.
3/8	1/4	□ - 64RT	0.94	23.9	0.25	6.4	0.25	6.4	0.30	7.7	0.18	4.6	7/16	0.47	11.9	0.47	11.9
1/2	1/4	□ - 84RT	1.06	26.9	0.25	6.4	0.25	6.4	0.40	10.2	0.18	4.6	9/16	0.53	13.5	0.53	13.5
1/2	3/8	□ - 86RT	1.06	26.9	0.25	6.4	0.25	6.4	0.40	10.2	0.30	7.7	9/16	0.53	13.5	0.53	13.5
3/4	1/4	□ - 124RT	1.31	33.4	0.25	6.4	0.25	6.4	0.65	16.6	0.18	4.6	13/16	0.66	16.7	0.66	16.7
3/4	3/8	□ - 126RT	1.31	33.4	0.25	6.4	0.25	6.4	0.65	16.6	0.30	7.7	13/16	0.66	16.7	0.66	16.7
3/4	1/2	□ - 128RT	1.31	33.4	0.25	6.4	0.25	6.4	0.65	16.6	0.40	10.2	13/16	0.66	16.7	0.66	16.7


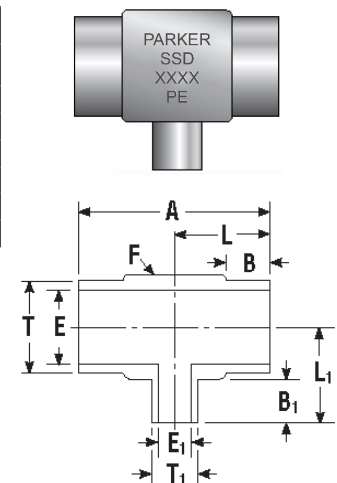


## Extended Branch

T Tube O.D.	Part Number	A		A <sub>1</sub>		B		B <sub>1</sub>		E		F Body Cube	L		L <sub>1</sub>	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm.		in.	mm	in.	mm.
1/4	□ - 4EBT	0.82	20.8	0.76	19.3	0.25	6.4	0.45	11.4	0.18	4.6	5/16	0.41	10.4	0.60	15.5

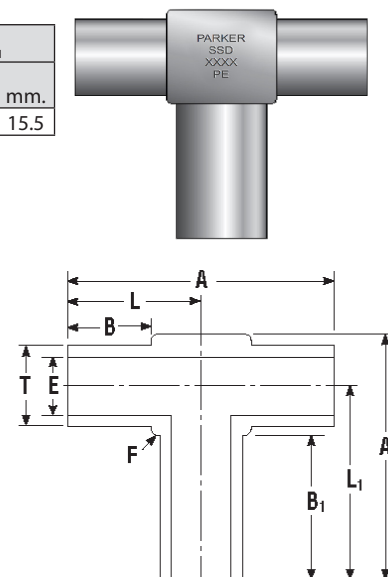

# Weld Fittings

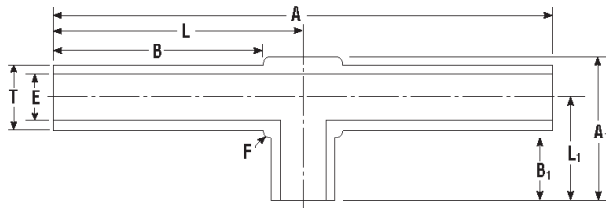
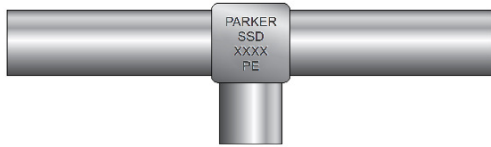


## Run Tee

T Tube O.D.	Part Number	A		A <sub>1</sub>		B		B <sub>1</sub>		E		F Body Cube	L		L <sub>1</sub>	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		in.	mm	in.	mm
1/4	□ - 4ERT	1.97	50.0	0.56	14.2	0.83	21.1	0.25	6.4	0.18	4.6	5/16	0.99	24.9	0.41	10.4

## Union Cross

T Tube O.D.	Part Number	A		B		E		F Body Cube	L	
		in.	mm	in.	mm	in.	mm		in.	mm
1/4	□ - 4UC	0.82	20.8	0.25	6.4	0.18	4.6	5/16	0.41	10.4
3/8	□ - 6UC	0.94	23.9	0.25	6.4	0.30	7.7	7/16	0.47	11.9
1/2	□ - 8UC	1.06	26.9	0.25	6.4	0.40	10.2	9/16	0.53	13.5
3/4	□ - 12UC	1.31	33.4	0.25	6.4	0.65	16.6	13/16	0.66	16.7

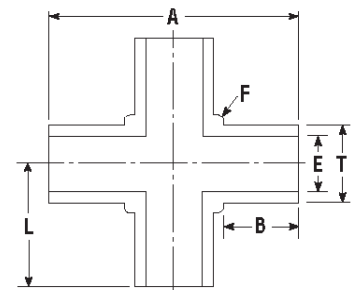

# Metal Face Seal and Weld Fittings

## Ordering Information

Parker metal face seal components and weld fittings are ordered by Ordering Number, as listed in this catalog.

SSS - 8 FG - 75 - PE

Material	Size	Configuration	Tube Stub Length	Internal Finish
MATERIAL	SIZE	Tube Stub Length <sup>1</sup>		Internal Finish
SS : 316 SS <sup>4</sup>	4 : 1/4"		25 : .25"	Blank : 10 Ra
SSS : 316L SS	6 : 3/8"		38 : .38"	PE : 5 Ra
SSD : 316L SS, double melt <sup>2</sup>	8 : 1/2"		75 : .75"	
	12 : 3/4"			
	16 : 1"			

Configuration			
FG	Female Gland	FN	Female Nut
MG	Male Gland	MN	Male Nut
SSW	Short Socket Weld	SMN	Short Male Nut
SW	Socket Weld	FCP	Female Cap <sup>3</sup>
RSW	Reducing Socket Weld	FCPL	Female Cap, Lanyard <sup>3</sup>
MW	Male Weld	MPG	Male Plug <sup>3</sup>
TAG	Tube Adaptor Gland	MPGL	Male Plug, Lanyard <sup>3</sup>
HFG	Female Gland, Hi-Flo	HFN	Female Nut, Hi-Flo
		HMN	Male Nut, Hi-Flo

SSD - 8 UC - PE

Material	Size	Configuration	Internal Finish
MATERIAL	SIZE	Internal Finish	
SSS : 316L SS	4 : 1/4"		Blank : 10 Ra
SSD : 316L SS, double melt <sup>2</sup>	6 : 3/8"		PE : 5 Ra
	8 : 1/2"		
	12 : 3/4"		

Configuration			
RU	Reducing Union	UT	Union Tee
UE	Union Elbow	RT	Reducing Tee
EUE	Extended Union Elbow	EBT	Extended Branch Tee
RE	Reducing Elbow	ERT	Extended Run Tee
TB	Tribow	UC	Union Cross
UE45	Union Elbow, 45		

<sup>1</sup> Not all fitting configurations will offer all tube stub lengths.

<sup>2</sup> Components ordered with SSD material designator only sold with "PE" internal finish.

<sup>3</sup> Not offered in "PE" finish.

<sup>4</sup> SS only offered for caps, nuts and plugs.

## 派克汉尼汾在中国的联系方式

**【重要通知】**美国Parker派克液压管阀件、密封件、仪器仪表、自动化、密封和过滤器产品咨询、询价和下单请发送邮箱:

fcg.cnmec@parkerdistribution.com.cn or sales@cnmec.biz

联系人: MS.凌工 173 1048 4595 李经理 15801532751

联系方式:

信德迈科技(北京)有限公司 CNMEC Technology Company

地址: 北京市朝阳区望京SOHO-T1-C座2115室

邮编: 100102

\*Tel: 010-8428 2935 | \* Fax: 010-8428 8762

\*手机: 139 101 22694 (微信同号)

\*电子邮件: sales@cnmec.biz

主页: <http://www.cnmec.biz>

联系人: 杨 健

请发送电子邮件正式询价。

### OFFER OF SALE:

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at [www.parker.com/veriflo](http://www.parker.com/veriflo)

### WARNING USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. THIS DOCUMENT IS FOR REFERENCE ONLY. PLEASE CONSULT FACTORY FOR LATEST PRODUCT DRAWINGS AND SPECIFICATIONS

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing are subject to change by Parker Hannifin Corp and its subsidiaries at any time without notice.

Proposition 65 Warning: This product contains chemicals known to the state of California to cause cancer or birth defects or other reproductive harm.

