

20,000 psi (1379 bar) Needle and Ball Valves

Catalog 4190-HH/20K

aerospace climate control electromechanical filtration fluid & gas handling hydraulics pneumatics process control sealing & shielding



ENGINEERING YOUR SUCCESS.

Contents

Page 4 Introduction : Needle Valve
Page 5 Design Features
Page 6 Construction
Page 7 Introduction : Ball Valve
Page 8 Design Features
Page 9 Construction
Page 10 Available End Connections
Page 11 How to Order

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries or its authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

Introduction - Needle Valve

The Parker 20K H-Series needle valve has been purpose designed for operation with any fluid up to 20,000 psi (1379 bar) rating. Complete with standard PTFE gland packing and non rotational tip gives the user assurance of total in service sealing security. 100% repeatable bubble tight shut off and Tru-Loc[®] gland adjuster security are key features of this design. A range of end connections are offered including Phastite[®] and Cone & Thread, with additional options for NACE compatible and heat code traceable materials.

Features


- All valves 100% factory tested
- Inlet & outlet connections on same plane for ease of installation
- PTFE packing
- Non rotating spindle tip for bubble tight shut off
- Externally adjustable packing
- NACE compatible option
- Operating threads outside washout area
 - No pressure retaining threads in contact with media

- Fine threaded stem raiser gives increased stem sensitivity and accuracy
- Tru-Loc[®] anti-vibration locking system on gland adjuster for 100% security
- HCT available on all wetted parts
- Alternative material options available on request
- Panel and side mounting as standard


Specifications

- 316 Stainless steel construction as standard
- Maximum cold working pressure rating - 20,000 psi (1379 bar)
- PTFE standard gland packing with PEEK anti-extrusion rings
- Max Cv 0.66 (dependent on fitting size)
- Temperature rating -54°C to +200°C (-65.2°F to +392°F)*

*refer to P/T graph below

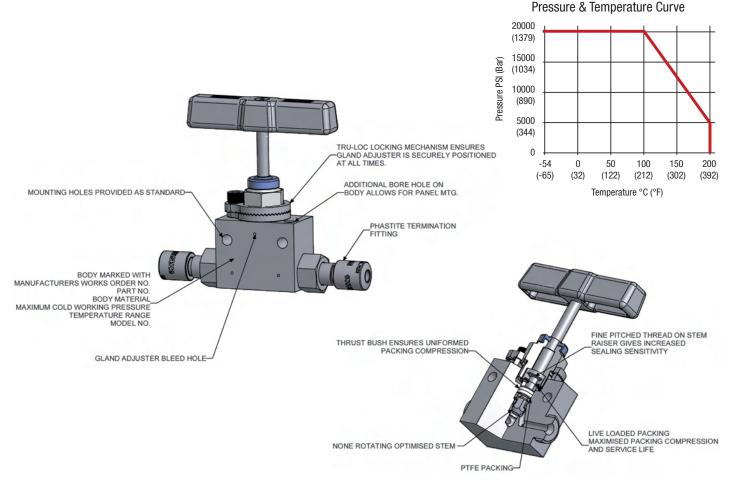

Design Features

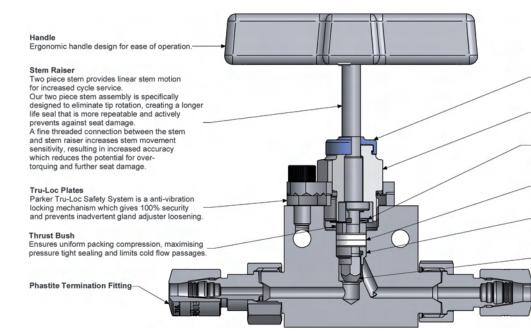

Dust Cap Preventing air born debris from contaminating the operating.

Gland Packing Adjuster For maximum packing stability and performance, simple and easily adjustable for gland wear compensation.

Live Loaded Packing Gives enhanced packing life without adjustment

Adjustable Gland Packing

Four piece gland packing gives maximum sealing area contact with anti-extrusion rings as standard

Lower Thrust Bush

Ensures uniform packing compression, maximising pressure tight sealing and limits cold flow passages.

Stem

Optimised, self centering, non-rotational tip design gives successive positive bubble tight shut off assuring the user of leakage free performance and downstream functional safety.


Standard Range Part Numbers


Deuters	Inlet	Outlet	Orifice Size	Max Cv	Dimension								
Part no.	Female	Female	mm (inch)	Rating	A mm (inch)	B mm (inch)	C mm (inch)	D mm (inch)	E mm (inch)	F mm (inch)	G mm (inch)	H mm (inch)	
Cone and Thread													
20KNVS4CT	1/4" C&T	1/4" C&T	2.8 (0.11)	0.14	50.8 (2.00)	28.6 (1.13)	113.2 (4.46)	41.3 (1.63)	31.8 (1.25)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVS6CT	3/8" C&T	3/8" C&T	5.0 (0.20)	0.50	63.5 (2.50)	28.6 (1.13)	116.4 (4.58)	44.5 (1.75)	33.0 (1.30)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVS9CT	9/16" C&T	9/16" C&T	6.0 (0.24)	0.66	76.2 (3.00)	28.6 (1.13)	122.7 (4.83)	50.8 (2.00)	36.5 (1.44)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
Phastite													
20KNVS4PH	1/4" PH	1/4" PH	3.7 (0.15)	0.14	66.0 (2.60)	28.6 (1.13)	116.4 (4.58)	44.5 (1.75)	31.8 (1.25)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVS6PH	3/8" PH	3/8" PH	6.0 (0.24)	0.50	66.0 (2.60)	28.6 (1.13)	122.7 (4.83)	50.8 (2.00)	34.9 (1.38)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVS8PH	1/2" PH	1/2" PH	6.0 (0.24)	0.66	66.0 (2.60)	28.6 (1.13)	122.7 (4.83)	50.8 (2.00)	34.9 (1.38)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVSM6PH	6 mm PH	6 mm PH	3.7 (0.15)	0.35	66.0 (2.60)	28.6 (1.13)	116.4 (4.58)	44.5 (1.75)	31.8 (1.25)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVSM8PH	8 mm PH	8 mm PH	4.7 (0.19)	0.60	66.0 (2.60)	28.6 (1.13)	122.7 (4.83)	50.8 (2.00)	34.9 (1.38)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVSM10PH	10 mm PH	10 mm PH	6.0 (0.24)	0.66	66.0 (2.60)	28.6 (1.13)	122.7 (4.83)	50.8 (2.00)	34.9 (1.38)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVSM12PH	12 mm PH	12 mm PH	6.0 (0.24)	0.66	66.0 (2.60)	28.6 (1.13)	122.7 (4.83)	50.8 (2.00)	34.9 (1.38)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	
20KNVSM14PH	14 mm PH	14 mm PH	6.0 (0.24)	0.66	66.0 (2.60)	28.6 (1.13)	122.7 (4.83)	50.8 (2.00)	34.9 (1.38)	12.0 (0.47)	82.7 (3.26)	36.0 (1.42)	

Other materials and connection options are available. The actual pressure ratings for any alternative option will vary from those stated - please consult with factory for your specific requirements.


The specification of any alternative material, connection or tubing is critical to the overall performance of the system. Caution should be exercised by the user to ensure proper selection in accordance with actual operating or design conditions.

Valves with Phastite® connections are recommended for use with 316/316L tubing conforming to ASTM A-269, having a hardness not exceeding 90HRB.

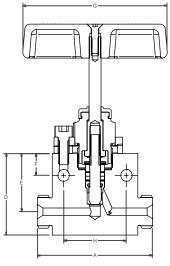



All dimensions to outer body

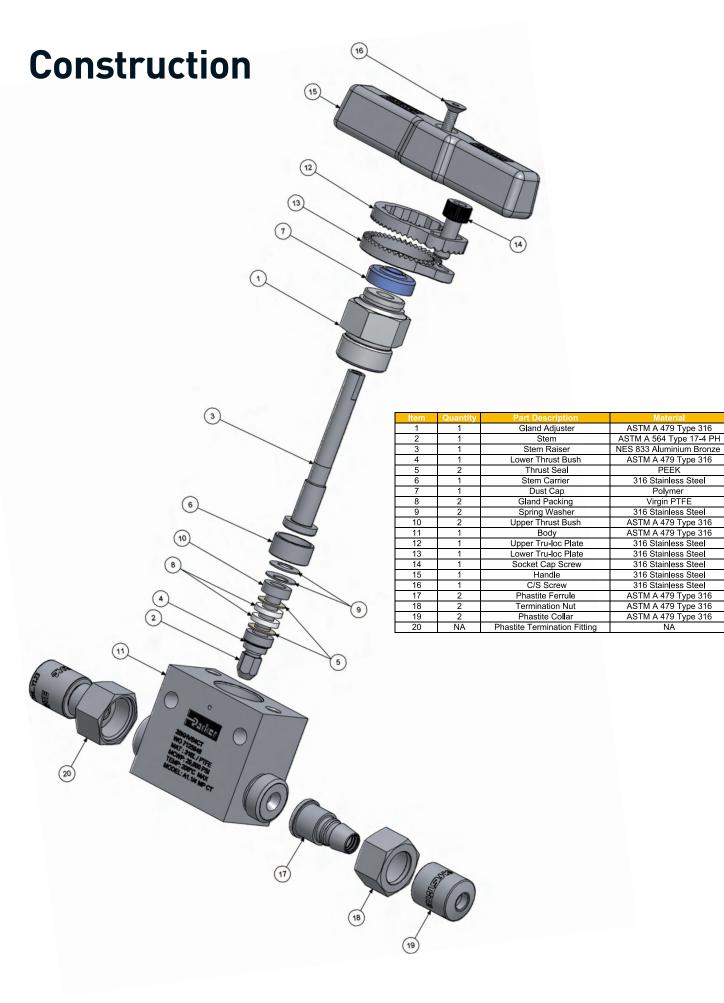

PEEK

Polymer

Virgin PTFE

NA

Introduction - Ball Valve

The Parker 20K Hi-Pro Ball Valve is a two piece bi-directional ball valve designed for cold working pressure applications of up to 20,000 psi (1379 bar) rating, giving continuous repeatable performance. They are suitable for the most demanding applications in the oil, gas and process control industries with the option for bracket or panel mounting as standard across the range. 100% repeatable bubble tight shut off, user friendly design and Tru-Loc[®] gland adjuster security are key features of this design that help distinguish our 20K Ball Valves against others. A range of end connections are offered including Phastite[®] and Cone & Thread, with additional options for NACE compatible and heat code traceable materials.

Features

- Two piece body design minimises leakage paths
- Safe installation process
- **Bi-directional** •
- **PEEK** standard ball seats material
- PTFE packing ۰
- Bubble tight shutoff
- Floating ball principal with dynamic response seats
- Low torque operation ۲
- Quarter turn positive stop ۲ handle with ergonomically


- **Connector thread** environmentally sealed
- Various integral connections available
- Tru-Loc® anti-vibration locking system on gland adjuster for 100% security
- All valves 100% factory tested
- **NACE** compatible option
- HCT available on all • wetted parts
- Alternative materials options available on request

Specifications


- 316 Stainless steel construction as standard
- Maximum cold working pressure rating
- 20,000 psi (1379 bar) with **PEEK** seats
- Max Cv 1.56 (dependent on fitting size)
- Temperature rating PEEK seats - 20°C to +200°C (-4°F to +392°F)*

200

*refer to P/T graph below

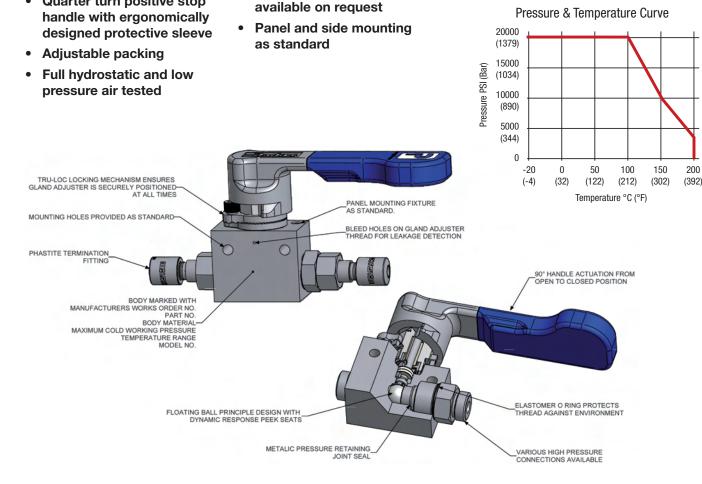

Design Features

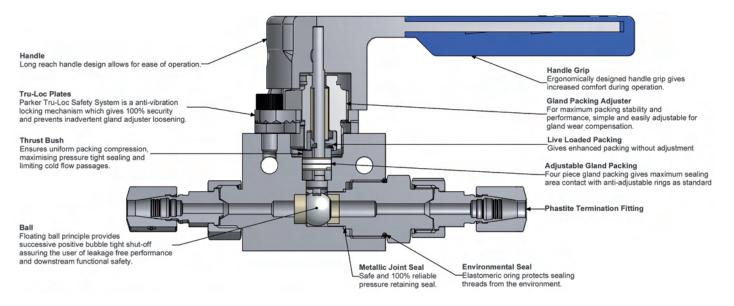


Standard Range Part Numbers


Part no.	Inlet	Outlet	Orifice Size	Max Cv	Dimension								
Part no.	Female	Female	mm (inch)	Rating	A mm (inch)	B mm (inch)	C mm (inch)	D mm (inch)	E mm (inch)	F mm (inch)	G mm (inch)	H mm (inch)	l mm (inch)
Cone and Thread													
20KBVS4CT	1/4" C&T	1/4" C&T	2.8 (0.11)	0.25	89.1 (3.50)	31.8 (1.25)	75.6 (2.98)	56.0 (2.21)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVS6CT	3/8" C&T	3/8" C&T	5.0 (0.20)	0.97	89.1 (3.50)	31.8 (1.25)	76.6 (3.02)	58.5 (2.30)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVS9CT	9/16" C&T	9/16" C&T	6.0 (0.24)	1.56	89.1 (3.50)	31.8 (1.25)	89.6 (3.53)	63.5 (2.50)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
Phastite													
20KBVS4PH	1/4" PH	1/4" PH	3.7 (0.15)	0.50	89.1 (3.50)	31.8 (1.25)	82.3 (3.24)	54.3 (2.14)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVS6PH	3/8" PH	3/8" PH	6.0 (0.24)	1.56	89.1 (3.50)	31.8 (1.25)	78.1 (3.08)	51.0 (2.01)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVS8PH	1/2" PH	1/2" PH	6.0 (0.24)	1.56	89.1 (3.50)	31.8 (1.25)	80.0 (3.15)	51.0 (2.01)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVSM6PH	6 mm PH	6 mm PH	3.7 (0.15)	0.50	89.1 (3.50)	31.8 (1.25)	82.3 (3.24)	54.3 (2.14)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVSM8PH	8 mm PH	8 mm PH	4.7 (0.19)	0.90	89.1 (3.50)	31.8 (1.25)	78.1 (3.08)	51.0 (2.01)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVSM10PH	10 mm PH	10 mm PH	6.0 (0.24)	1.56	89.1 (3.50)	31.8 (1.25)	78.1 (3.08)	51.0 (2.01)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVSM12PH	12 mm PH	12 mm PH	6.0 (0.24)	1.56	89.1 (3.50)	31.8 (1.25)	80.0 (3.15)	51.0 (2.01)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)
20KBVSM14PH	14 mm PH	14 mm PH	6.0 (0.24)	1.56	89.1 (3.50)	31.8 (1.25)	79.1 (3.11)	51.0 (2.01)	36.0 (1.42)	15.9 (0.63)	32.5 (1.28)	44.5 (1.75)	120.5 (4.74)

Other materials and connection options are available. The actual pressure ratings for any alternative option will vary from those stated - please consult with factory for your specific requirements.

The specification of any alternative material, connection or tubing is critical to the overall performance of the system. Caution should be exercised by the user to ensure proper selection in accordance with actual operating or design conditions.

Valves with Phastite[®] connections are recommended for use with 316/316L tubing conforming to ASTM A-269, having a hardness not exceeding 90HRB.

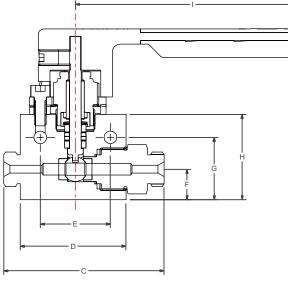




Π

All dimensions to outer body

Construction

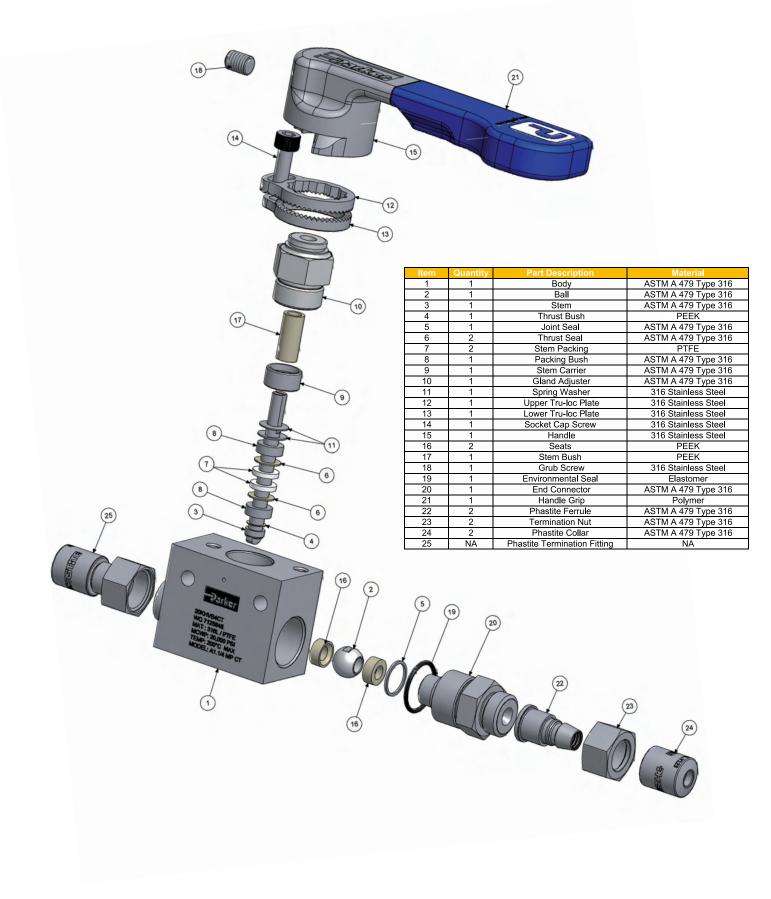

Available End Connections

Phastite[®]

Phastite^{*} is the perfect partner for both the 20K Hi-Pro Ball Valve and 20K H-Series Needle Valve. It's a breakthrough in tube connection systems with an innovative design concept that combines quick installation with a simple assembly process. Phastite^{*} is manufactured from standard materials and requires no special processes to be adopted.

Design

Phastite[®] has been specifically designed to meet ever-increasing industry standards and demands with regards to tube connectors and pressure containment. The latest CAE and FEA techniques have been employed to optimise the design of the connectors and assembly tooling.

Simple make-up

Consistent make-up to a predetermined stop face on the body. This reduces the possibility of any incorrect make-up.

Increased Safety


Phastite's simple assembly process dramatically reduces the number of operations needed to assemble a leak free joint. Simply insert the tubing into the pre-assembled connector. The Phastite[®] tooling delivers a leak free connection first time – every time.

Vibration tolerant

Phastite[®] provides a permanent leak free connection. There are no threaded components, removing potential loosening problems in vibration applications.

No loose parts

Phastite[®] connectors are supplied pre-assembled, no loose parts and no disassembling needed by the installer. This eliminates assembly errors, as there are no parts to lose or incorrectly assemble.




Valves with Phastite[®] connections are designed and recommended for use with 316/316L tubing conforming to ASTM A-269, having a hardness not exceeding 90HRB.

Further information on Phastite[®] can be found in our technical catalogue 4235-PH.

Cone & Thread 20,000 PSI Fittings


All valves required with cone and thread fittings are supplied complete with glands and collars, to meet the industry standard requirement for Autoclave style medium pressure 20,000 PSI connections.

It is the users responsibility to select the appropriate medium pressure 20,000 psi tubing, being 1/8 hard 316 seamless stainless steel tubing and designed to work with Autoclave style fittings.

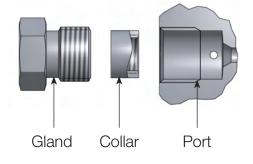


How to Order


The correct part number is easily derived from the following number sequence. The five product characteristics required are coded as shown below.

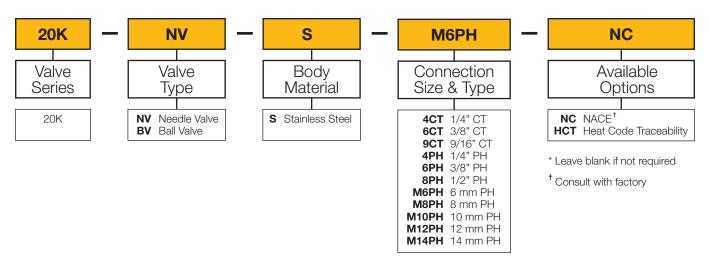

Examples



Describes a 20K Needle valve in stainless steel construction, equipped with 6mm Phastite[®] inlet and outlet. Supplied with Heat Code Traceability marking on all wetted parts.



Describes a 20K Ball Valve in stainless steel construction, equipped with 1/4" Cone & Thread inlet and outlet. Supplied with NACE Certification.

Parker Worldwide

Parker 仪表管阀件联系方式:

信德迈科技(北京)有限公司 CNMEC Technology Company 地址:北京朝阳区望京街10号望京SOHO-T1-C座2115室 邮编:100102 电话:010-8428 2935, 8428 9077, 8428 3983 手机:139 1096 2635 Http://www.cnmec.biz E-mail:sales@cnmec.biz

传真:010-8428 8762



